




Electrical Specification

ITEMS	SPEC	UNIT
Center Frequency [fo]	1945	MHz
Bandwidth [BW]	$f_o \pm 20$ [1940 ~ 1960]	MHz
Insertion Loss in BW	1.5	dB max
Ripple in BW	0.2	dB max
Return Loss in BW	18.0	dB min
Attenuation <input checked="" type="checkbox"/> Absolute Value <input type="checkbox"/> Relative Value	50dB min @ $f_o \pm [2130 \sim 2150]$	MHz
	60dB min @ $f_o \pm [824 \sim 894]$	MHz
	dB min @ $f_o \pm [\sim]$	MHz
	dB min @ $f_o \pm [\sim]$	MHz
Group Delay Variation		ns max
Input Power	2	W max.
In/Out Impedance	50 Ω	
Operation Temperature Range	-40°C to +85°C	

Mechanical Specification

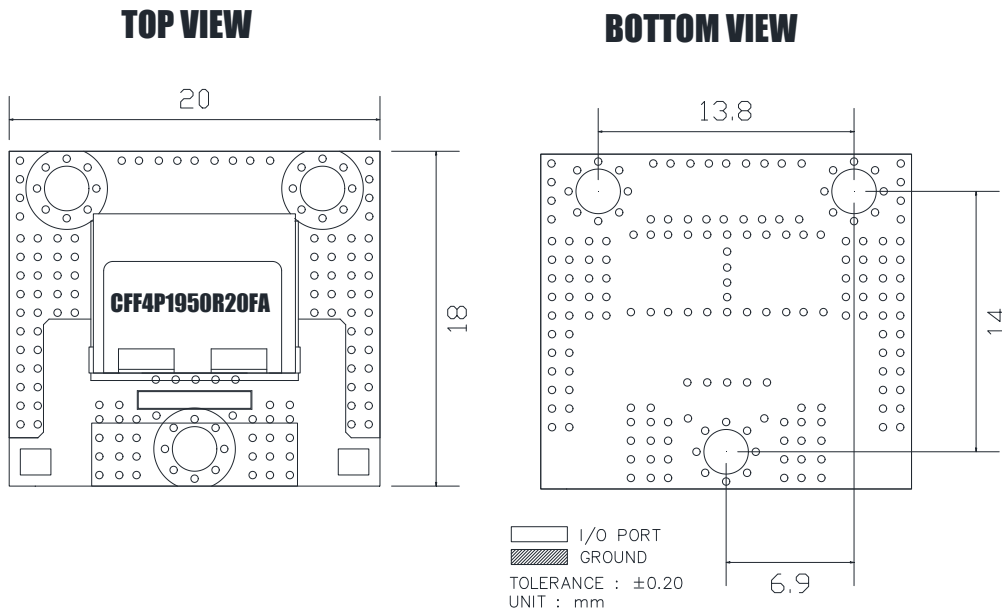

Plot Data

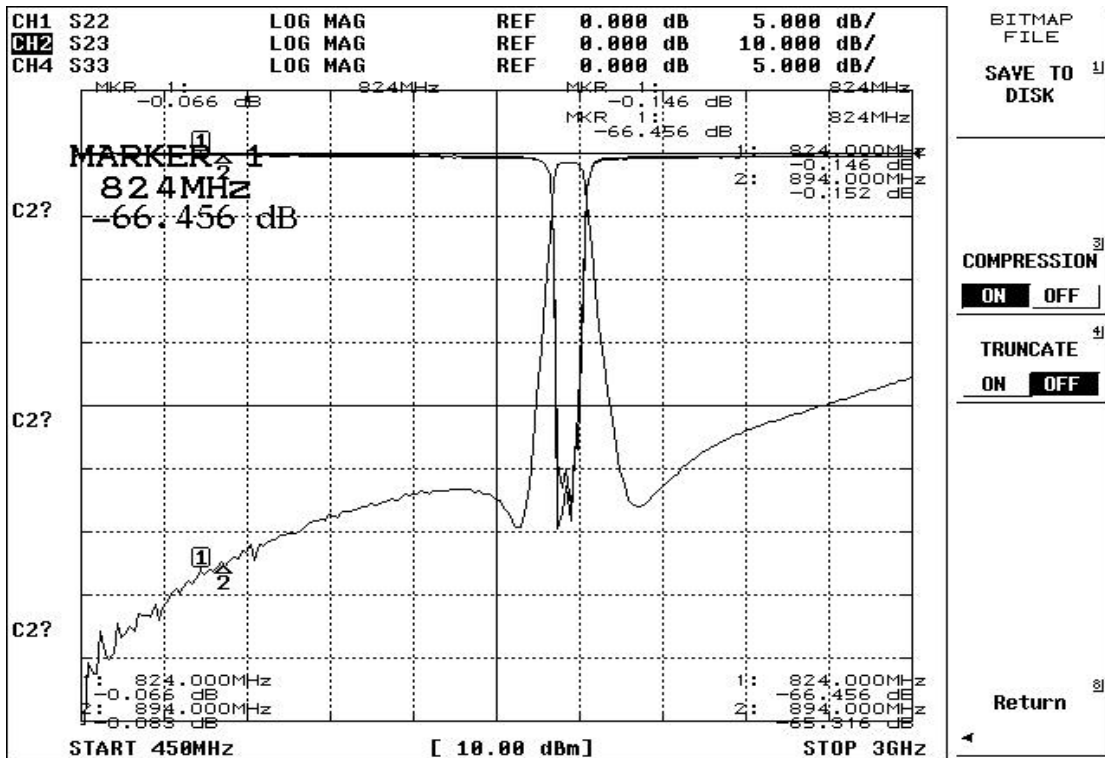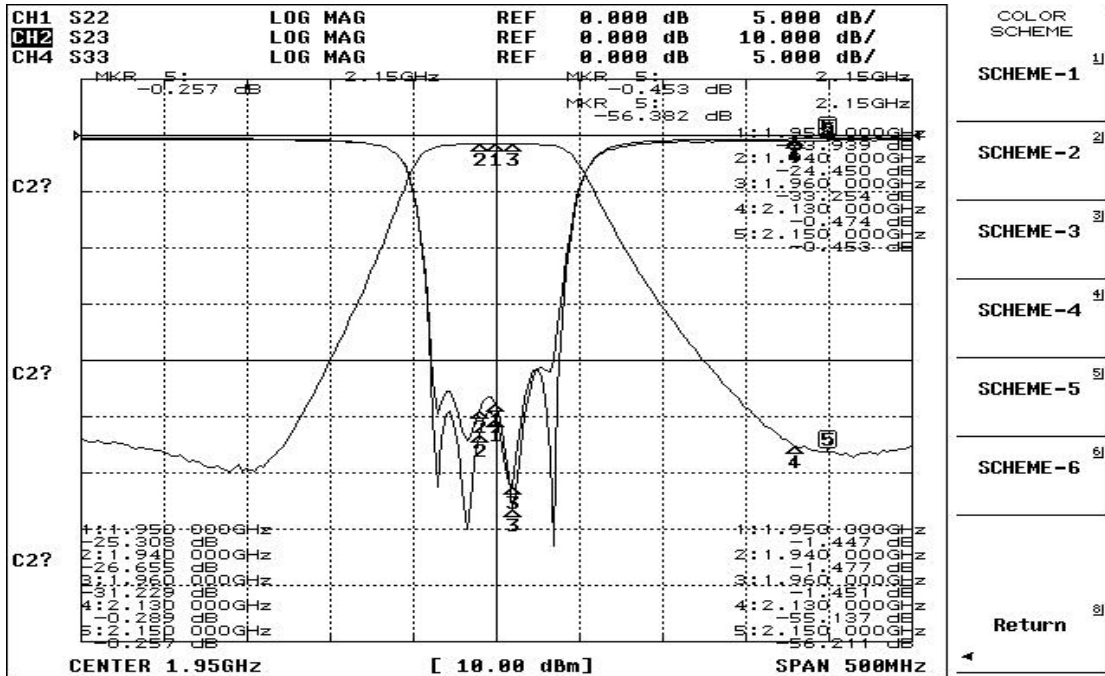



🔊 Recommended PC Board Pattern

🔊 Soldering Condition