




**Electrical Specification**



ITEMS	SPEC	UNIT
Center Frequency [fo]	902.5	MHz
Bandwidth [BW]	fo ±12.5[890~915]	MHz
Insertion Loss in BW	2.5	dB max
Ripple in BW	0.7dB	dB max
Return Loss in BW	16	dB min
Attenuation <input checked="" type="checkbox"/> Absolute Value <input type="checkbox"/> Relative Value	25.0 dB min @ 500~880	MHz
	40.0 dB min @ 935~960	MHz
	dB min @ fo ± [ ~ ]	MHz
	dB min @ fo ± [ ~ ]	MHz
Group Delay Variation		ns max
Input Power		W max.
In/Out Impedance	50 Ω	
Operation Temperature Range	-40°C to +85°C	



**Mechanical Specification**

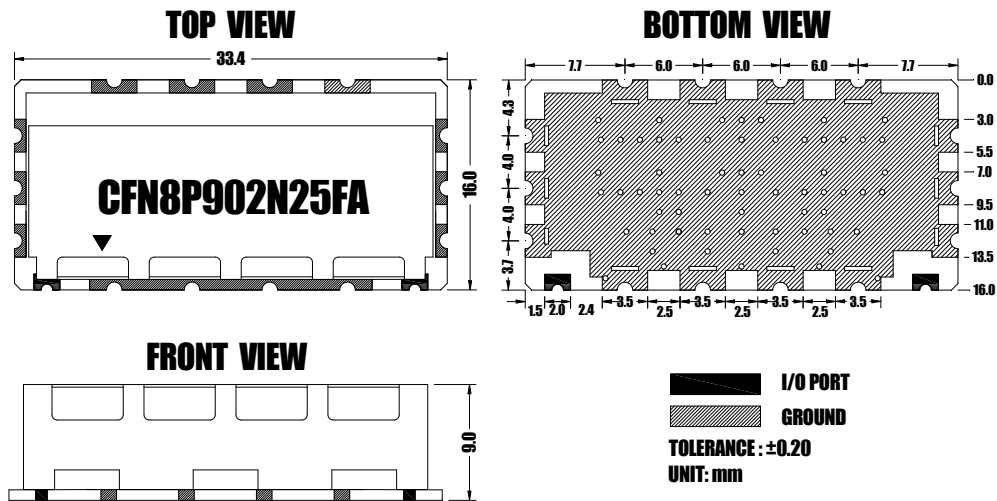

Plot Data

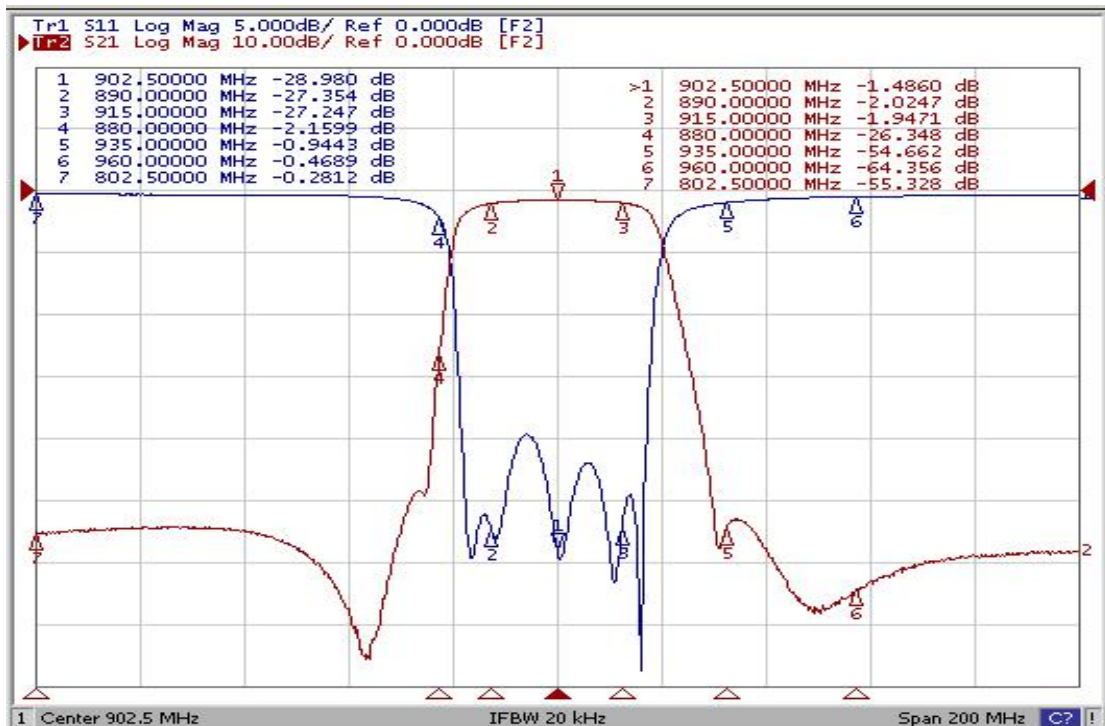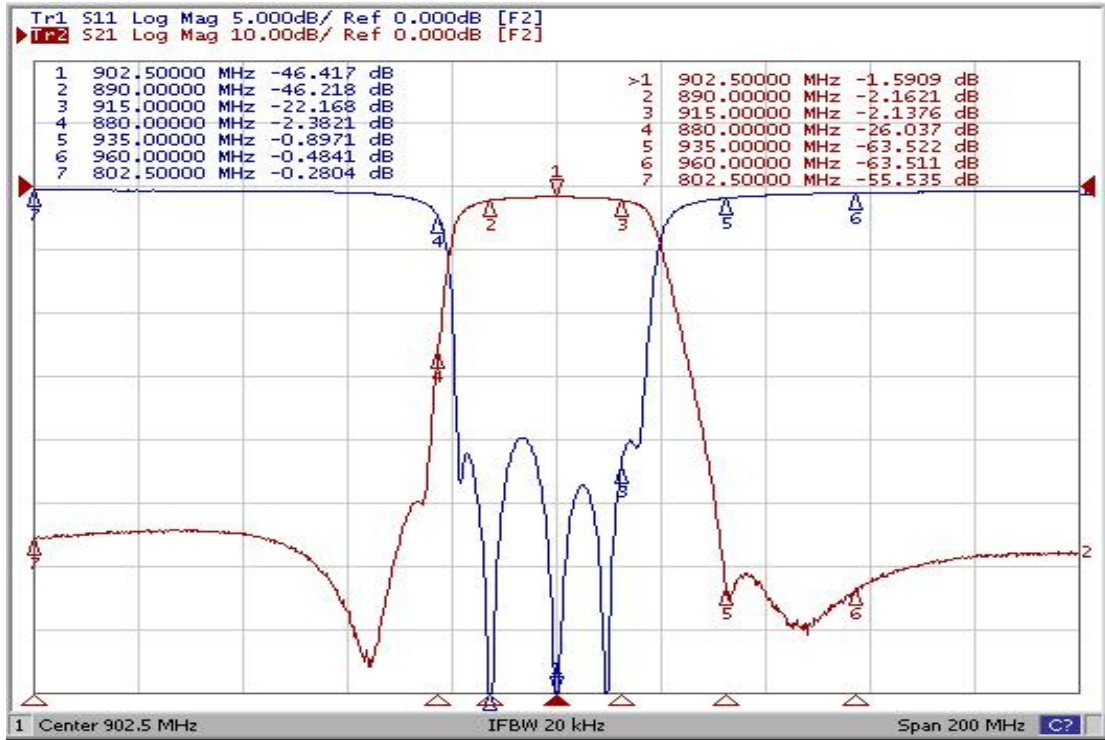

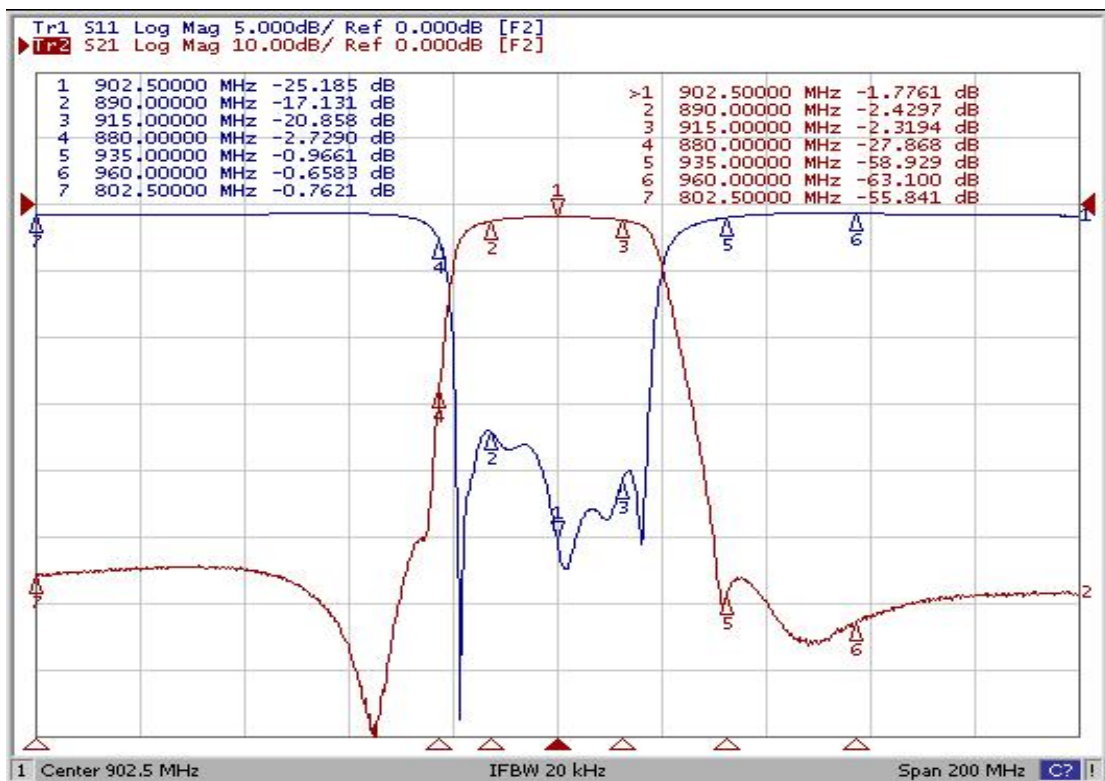
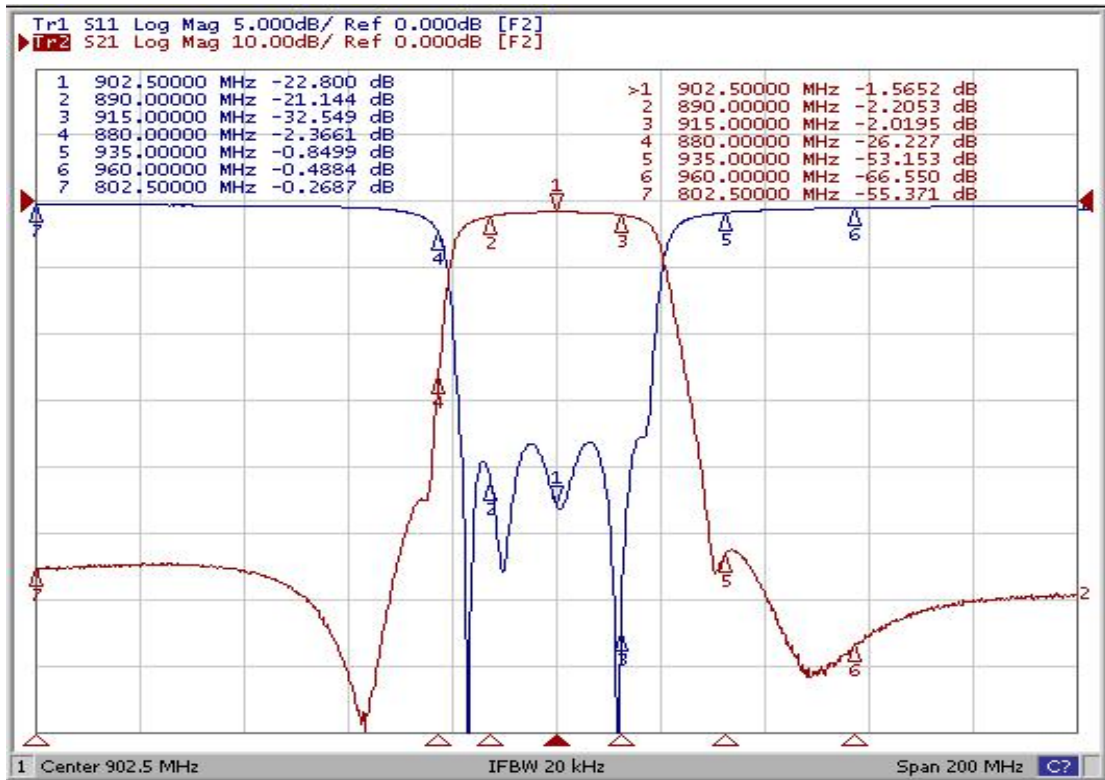


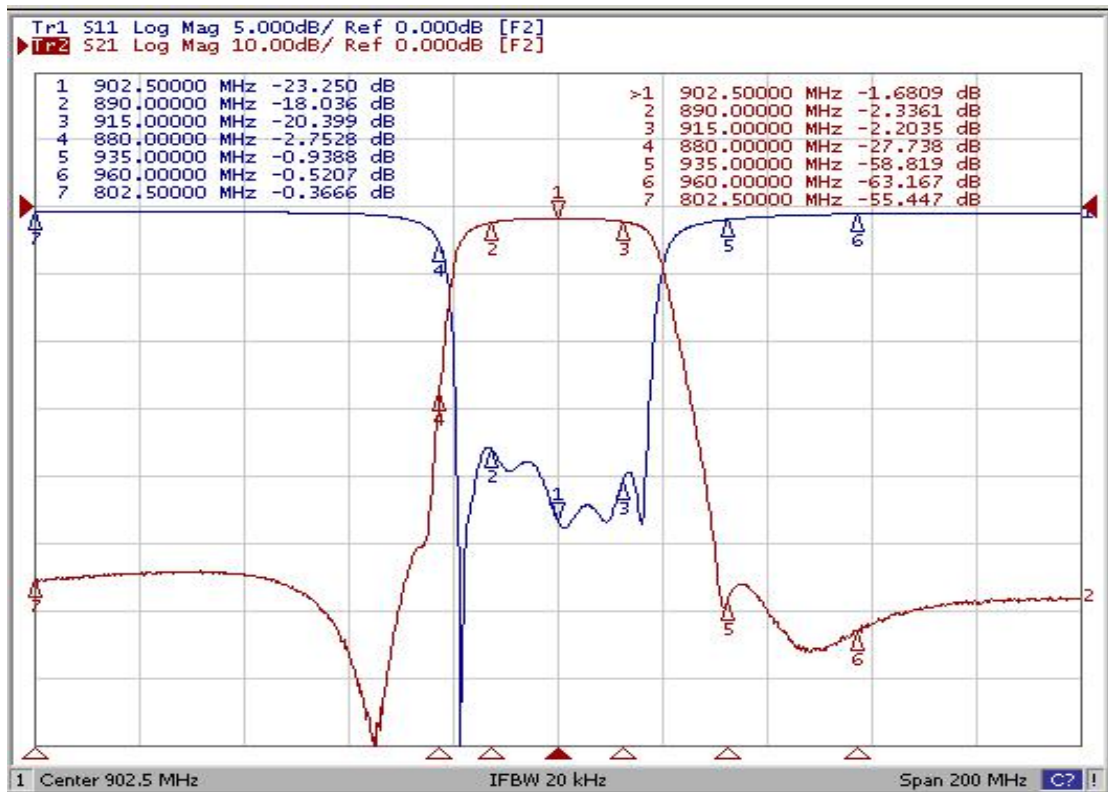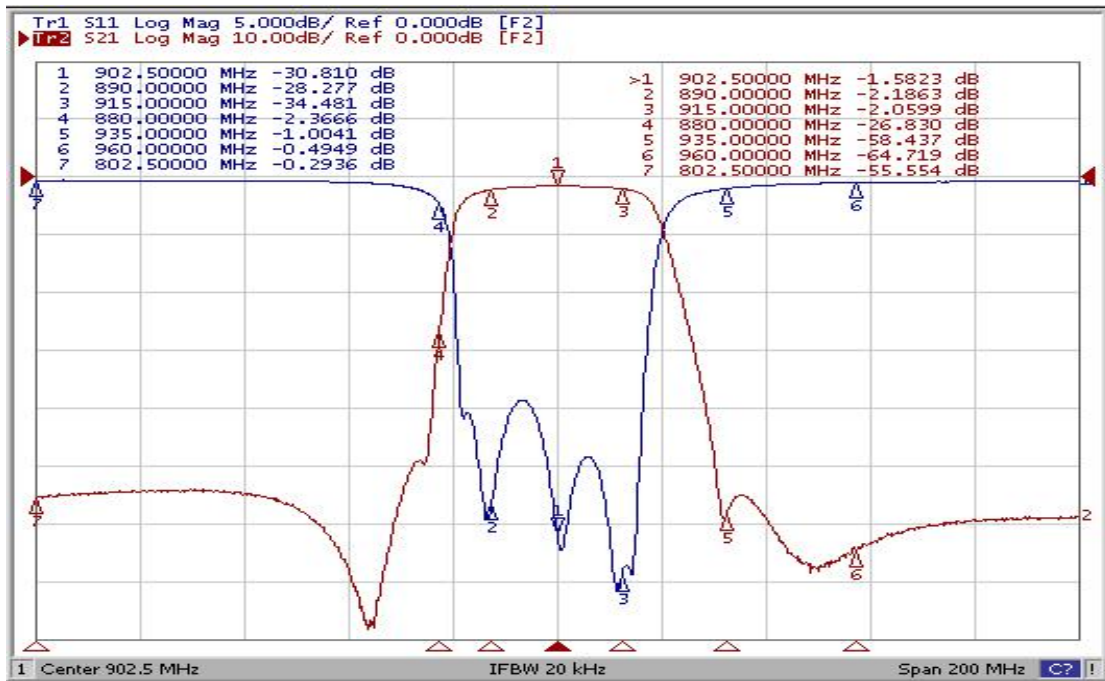




# MONO FILTER


# CFN8P902N25FA

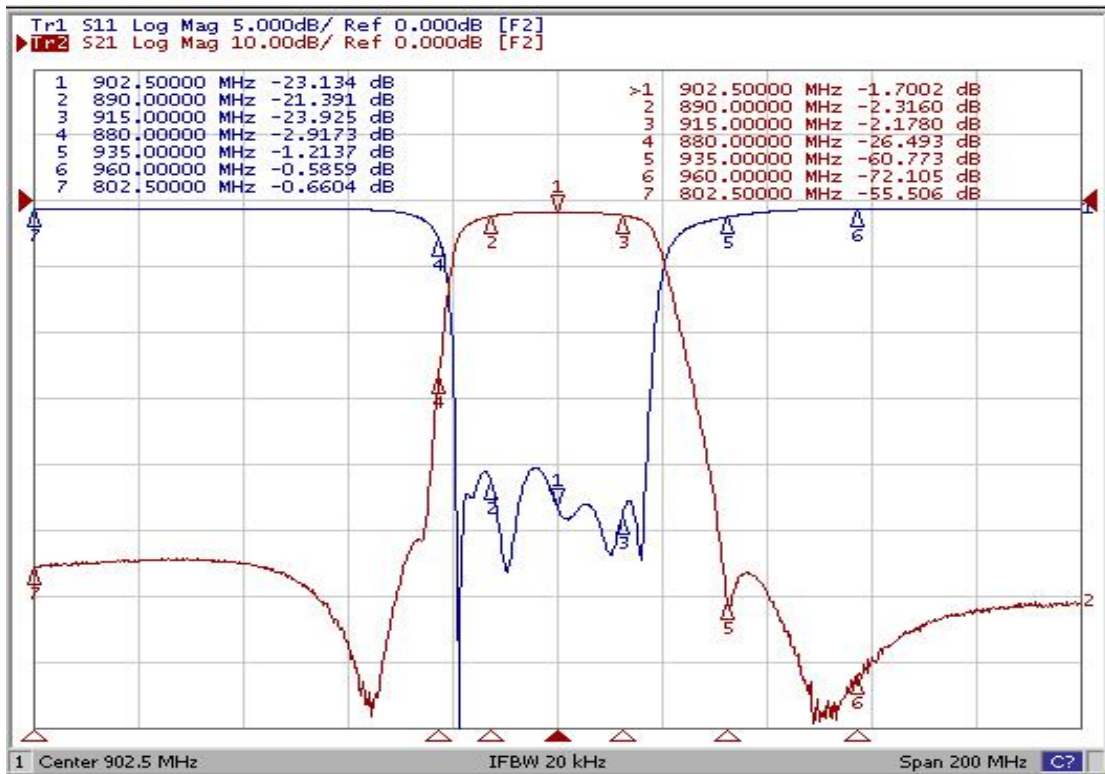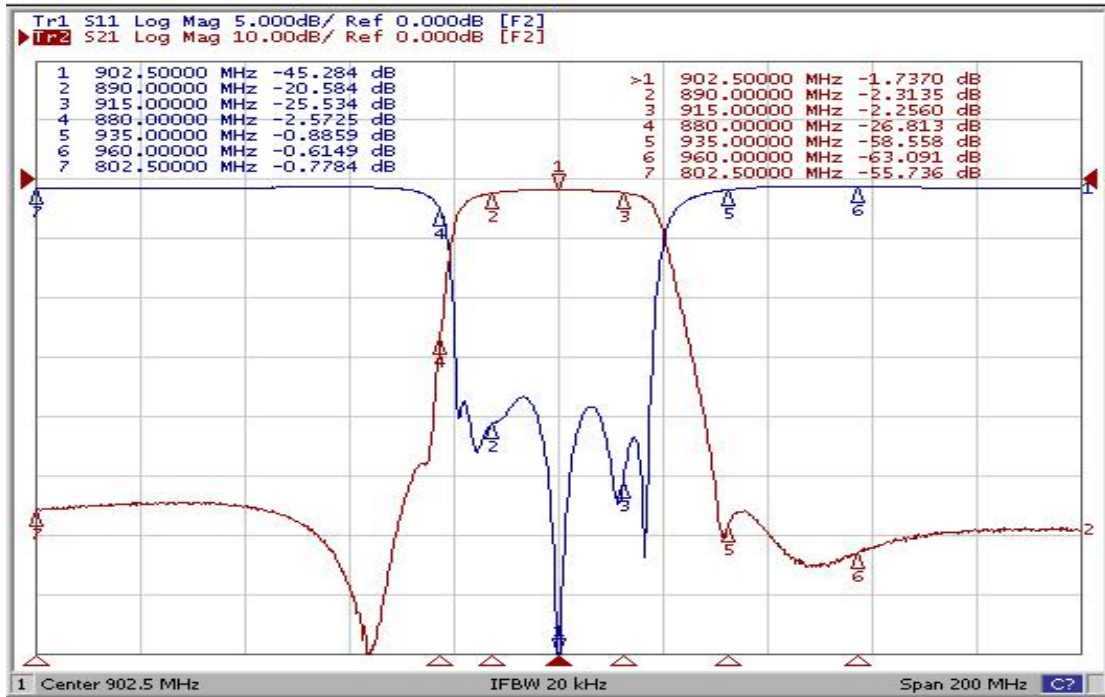




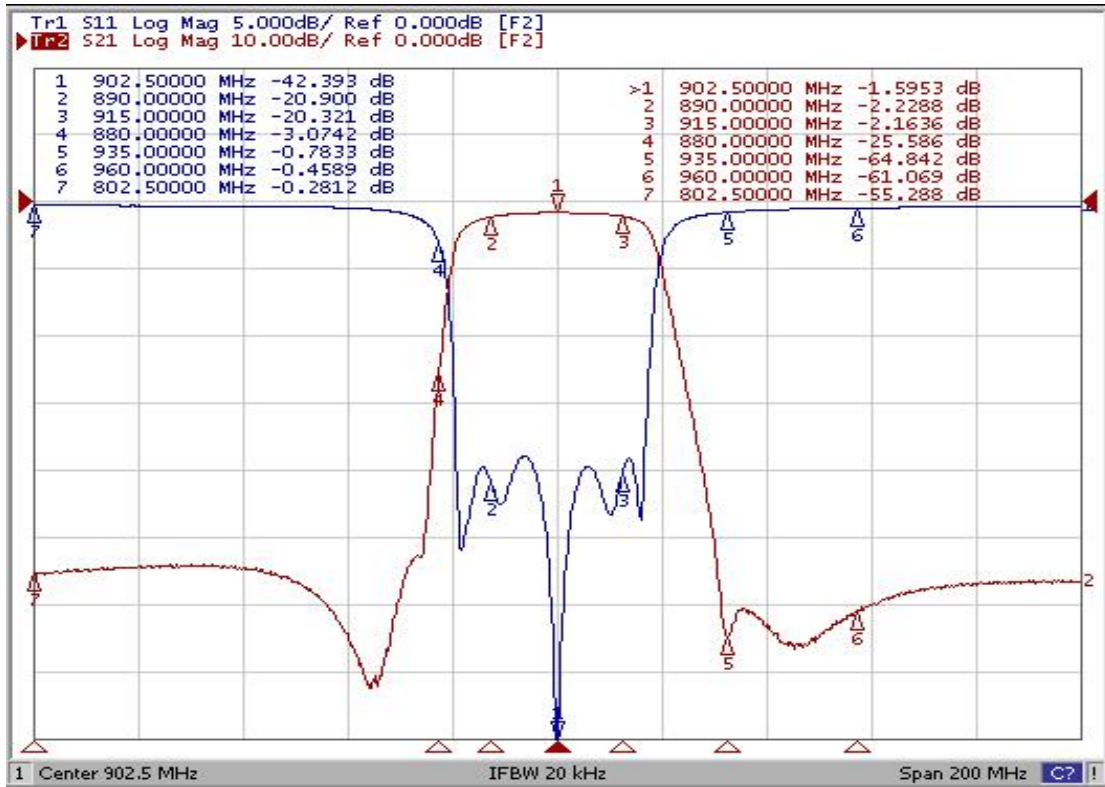

**Recommended PC Board Pattern**

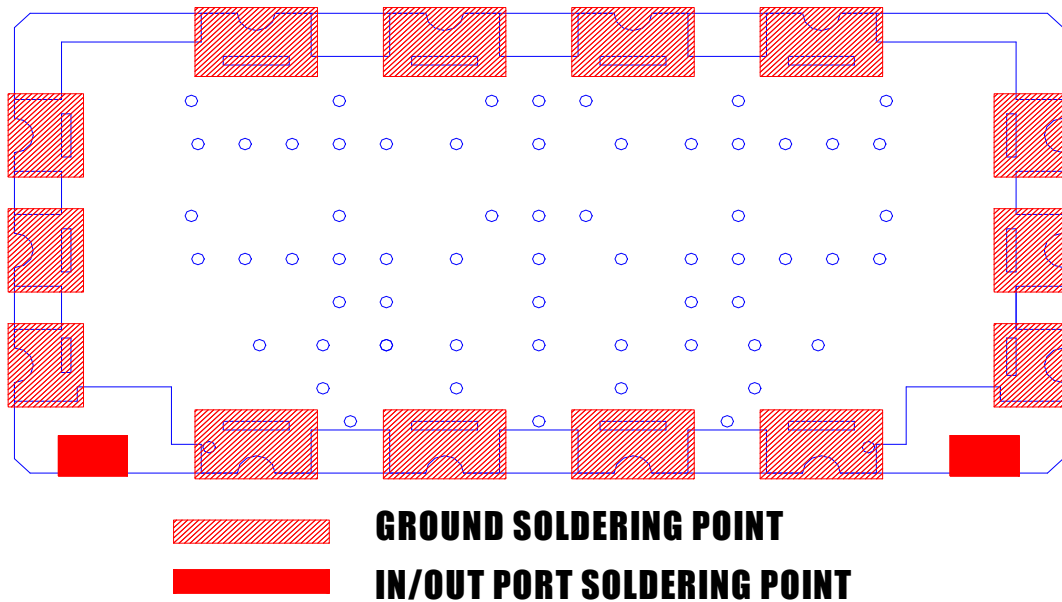

**Soldering Condition**

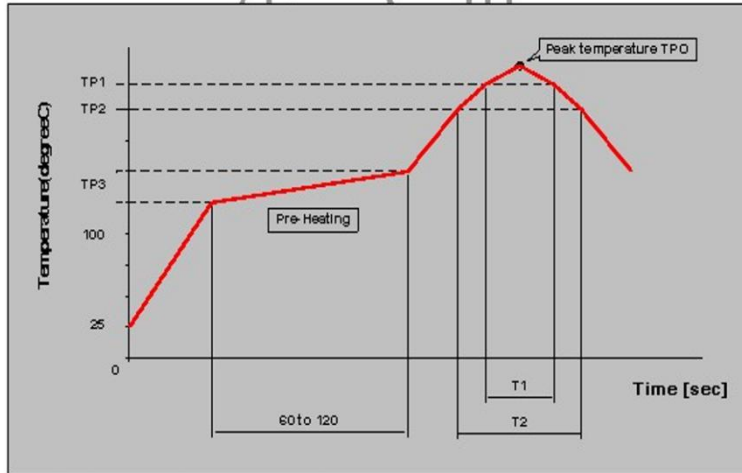

Measuring point of temperature : IN-OUT Terminals of The Device

Reflow Soldering : Both Convection and Infrared Rays, Hot Air and Hot Plate

Reflow standard condition	TPO (°C)	TP1 (°C)	T1 (s)	TP2 (°C)	T2 (s)	TP3 (°C)
Sn-3Ag-0.5 solder	245±5	220	30 to 60	—	—	150 to 180
Test condition of reflow heat resistance	260±5/0	240	20	220	70	150 to 180